



NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 20A
- 3.Torque value : M2.5 , 3.5Lb.in
- 4.Wire range : 30~12AWG

IEC Standard




- 1.Rated voltage/current : 450V / 24A
- 2.Torque value : M2.5 , 0.4N·m
- 3.Wire range : 0.5~2.5mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 7.50mm, Poles : N=02~16P
- 3.Stripping length : 12~13mm
- 4.Withstanding voltage : AC2500V/1Min
- 5.Operating temperature: -40°C~+105°C
- 6.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						
TO	Over	TO	Over	TO	Over	TO	Over	0.1/10
6	6 TO 10	10	10 TO 24	30	30 TO 60	60	60 TO 100	150
								≤
	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
								±2°


7.RoHS Compliance

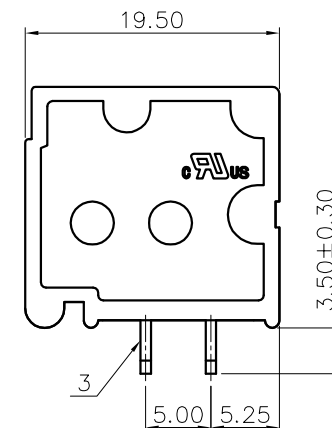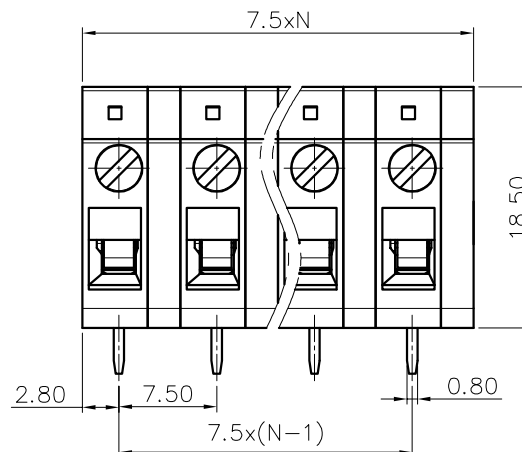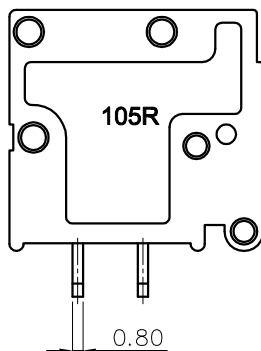

Ordering Information

105R-750 XX G 0 1

Pitch 750=7.5PH
No.of pins 2P~24P
Housing Color B=Black G=Green U=Blue R=Red W=White Y=Yellow O=Orange E=Grey
Packing 0=Pe bag T=Tube A=Tray

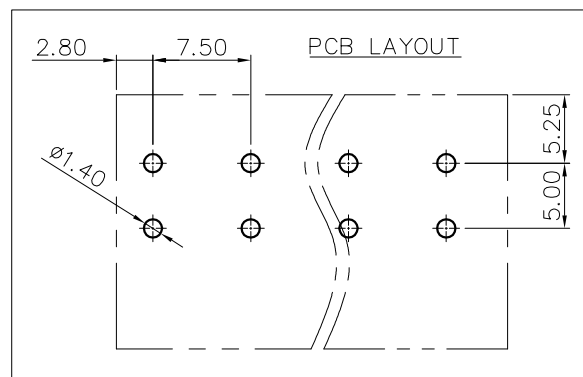

DRAW	SHUANGPING ZHENG	SCALE	FIT	 上海爱默电子科技有限公司 Tel: 86-21-37680290 Fax: 86-21-37680291	
		UNIT	mm		
CHECK	LICHAD LIU	SIZE	A4	PART NO. 105R-750XXG01	
		SHEET	1/1	TITLE: 105R-7.5-XXP 螺钉式/弯脚/绿色	
APPROVE	YONGLIANG GAO	PROJ.			