

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 60A
- 2.Torque value : M4 , 10.53Lb.in
- 3.Wire range : 20~6AWG

IEC Standard





- 1.Rated voltage/current : 1000V/65A
- 2.Torque value : M4 , 1.2N·m
- 3.Wire range : 2.5~16mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 10.16mm, Poles : N=01~12P
- 3.Stripping length : 10~11mm
- 4.Withstanding voltage : AC3500V/1Min
- 5.Operating temperature: -40°C~+105°C
- 6.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm						
TO	Over	TO	TO	Over	Over	Over	Over		0.1/10
6	6 TO 10	10 TO 24	30	30 TO 60	60 TO 100	100 TO 150	150		<
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30		±2'

7.RoHS Compliance

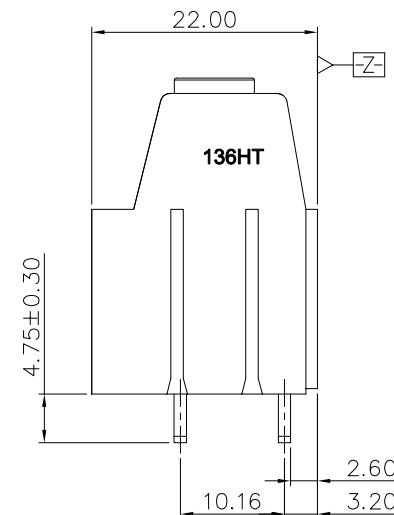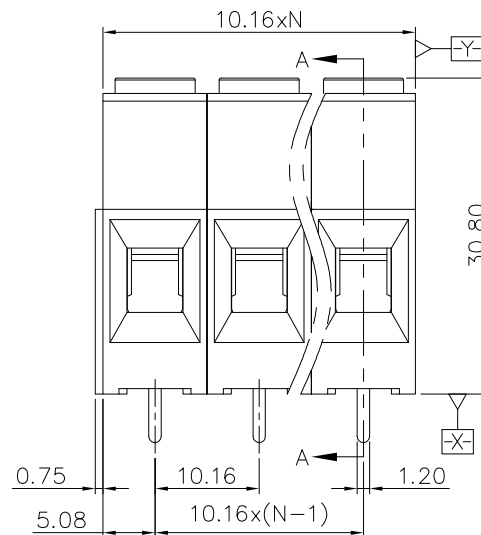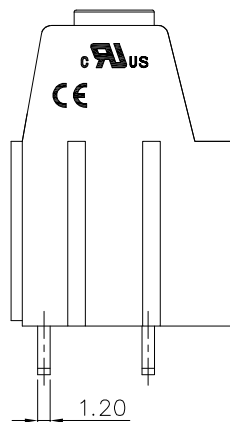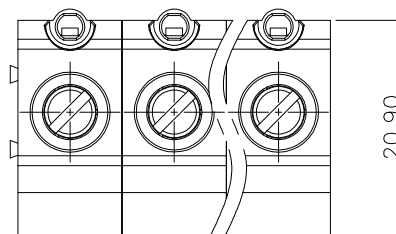

Ordering Information


136HT- 1016 XX G 0 1

Pitch
1016=10.16PH

No.of pins
1P~12P

Housing Color
B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey

Packing
0=Pe bag
T=Tube
A=Tray

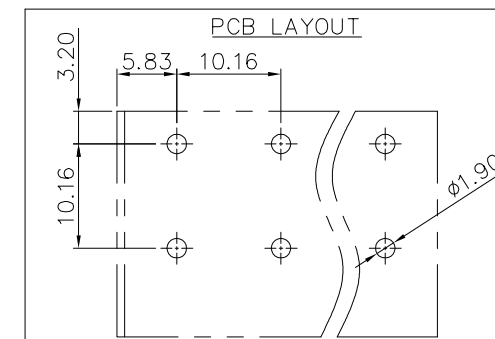

DRAW	SHUANGPING ZHENG	SCALE	FIT	 上海爱默电子科技有限公司 Tel: 86-21-37680290 Fax: 86-21-37680291
		UNIT	mm	
CHECK	LICHAD LIU	SIZE	A4	PART NO. 136HT-1016XXG01
		SHEET	1/1	
APPROVE	YONGLIANG GAO	PROJ.		TITLE: 136HT-10.16-XXP螺钉式/绿色/一字螺丝