

SPECIFICATIONS

Rated(额定参数): 300V,15A
Dielectric strength(抗电强度): AC1500V/1 Minute
Insulation Resistance(绝缘电阻):1000MΩ Min
Contact Resistance(接触电阻):20mΩ Max
Screw Torque(扭矩): 0.40Nm (3.5Lb.in)
Wire Range(线径):12~24AWG
Strip length(剥线长度):4.5~5mm
Temp. range(操作温度): -40℃~+105℃
MAX Soldering(瞬时温度):+250℃,5s

Housing Material(塑件): PA66 (UL94 V-0)
Contact(端子): Brass, Tin plating(黄铜镀锡)
Wire protector(弹片): Bronze(磷铜), Ni plating(镀镍)
Screw (螺丝): M2.5, Steel, Zinc plating(钢,镀锌)

PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				
TO	OVER	OVER	TO	OVER	OVER	OVER	OVER
6	6	10	30	30	60	100	150
	TO	TO		TO	TO	TO	
	10	24		60	100	150	
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00

Ordering Information




301 - 500 XX G 0 1

Pitch
500=5.0PH

No.of pins
2P,3P,4P~24P

Housing Color
B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey

Packing
O=Pe bag
T=Tube
A=Tray

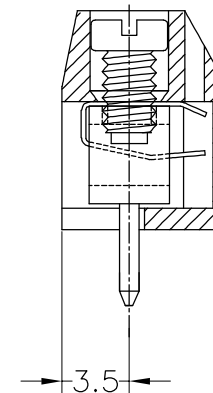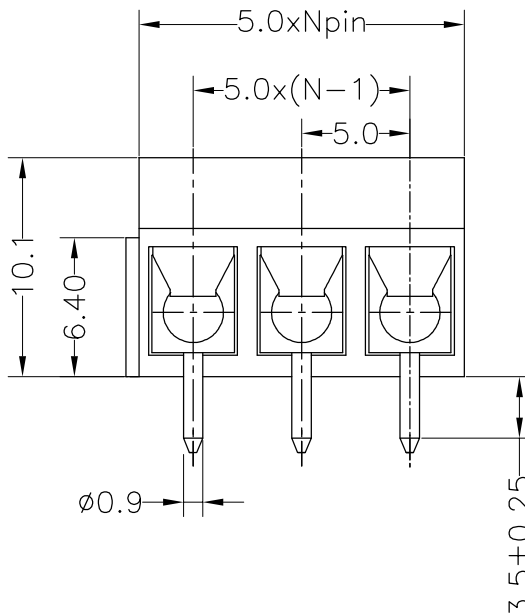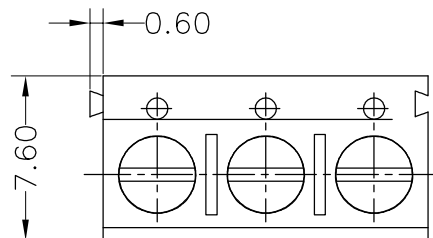

DRAW	SHUANGPING ZHENG	SCALE	FIT	 上海爱默电子科技有限公司 Tel: 86-21-37680290 Fax: 86-21-37680291	
		UNIT	mm		
CHECK	LICHAO LIU	SIZE	A4	PART NO. 301-500XXG01	
		SHEET	1/1	TITLE: 301-5.00-XXP螺钉式/绿色	
APPROVE	YONGLIANG GAO	PROJ.			