

SPECIFICATIONS

Rated(额定参数): 300V,16A

Dielectric strength(抗电强度): AC1250V/1 Minute

Insulation Resistance(绝缘电阻):1000MΩ Min

Contact Resistance(接触电阻):20mΩ Max

Screw Torque(扭矩): 0.2Nm (1.7Lb.in)

Wire Range(线径):18~24AWG

Strip length(剥线长度):5~6mm

Temp. range(操作温度): -40℃~+105℃

MAX Soldering(瞬时温度):+250℃,5s

IEC Standard

Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5KV	2.5KV	2.5KV
Rate voltage(V)	130V	130V	130V
Rate current(A)	8A		

Housing Material(塑件): PA66 (UL94 V-0)

Contact(端子): Brass, Tin plating(黄铜镀锡)

Wire protector(弹片): Bronze(磷铜), Ni plating(镀镍)

Screw(螺丝): M2.0, Steel, Zinc plating(钢,镀锌)

PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				
TO 6	OVER 6 TO 10	OVER 10 TO 24	TO 30	OVER 30 TO 60	OVER 60 TO 100	OVER 100 TO 150	OVER 150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00

Ordering Information






350 - 350 XX G 0 1

Pitch
350=3.50PH

No.of pins
2P,3P,4P~24P

Housing Color
B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey

Packing
0=Pe bag
T=Tube
A=Tray

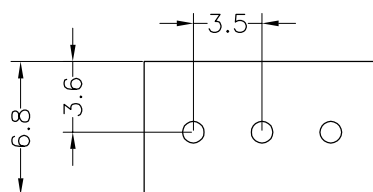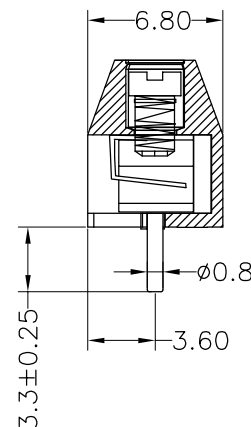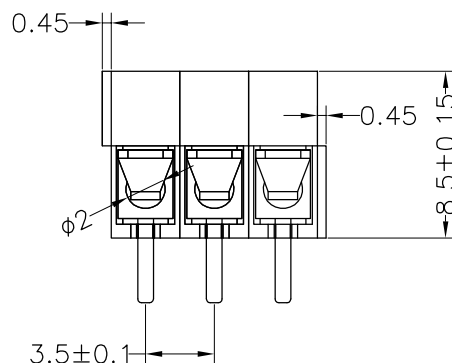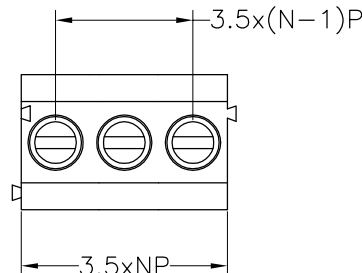

Recommended P.C.B Layout(Top Side)

DRAW	SHUANGPING ZHENG	SCALE	FIT	 上海爱默电子科技有限公司 Tel: 86-21-37680290 Fax: 86-21-37680291	
CHECK	LICHAO LIU	UNIT	mm		
APPROVE	YONGLIANG GAO	SIZE	A4		
		SHEET	1/1		
		PROJ.		PART NO.	350-350XXG01
				TITLE:	350-3.5-XXP螺钉式/绿色