

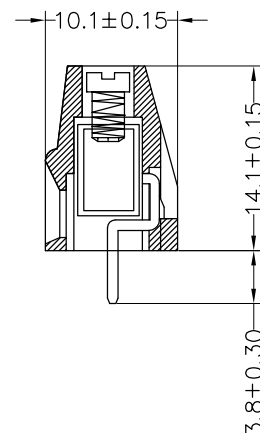



HSF RoHS c^{us} CE

SPECIFICATIONS

Rated(额定参数): 300V,10A
Dielectric strength(抗电强度): AC2000V/1 Minute
Insulation Resistance(绝缘电阻):1000MΩ Min
Contact Resistance(接触电阻):20mΩ Max
Screw Torque(扭矩): 0.4Nm (3.5Lb.in)
Wire Range(线径):12~24AWG
Strip length(剥线长度):6~7mm
Temp. range(操作温度): -40℃~+105℃
MAX Soldering(瞬时温度):+250℃,5s

Housing Material(塑件): PA66 (UL94 V-0)
Contact(端子): Brass, Tin plating(黄铜镀锡)
Clamp(方块): Brass/Steel(铜/铁), Ni plating(镀镍)
Screw (螺丝): M2.5, Steel, Zinc plating(钢,镀锌)



PITCH RANGE IN MM			NOMINAL DIMENSION RANGE IN MM				
TO	OVER	OVER	TO	OVER	OVER	OVER	OVER
6	6	10	30	30	60	100	OVER
10	10	24	60	60	100	150	150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00

Ordering Information


128 - 508 XX G X 2

Pitch
508=5.08PH

No.of pins
2P,3P,4P~24P

Housing Color
B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey

Packing
O=Pe bag
T=Tube
A=Tray



Recommended P.C.B Layout(Top Side)

OPERATION		DRAW	BEN	17.01.04	SCALE	FIT
X.X	±0.30				UNIT	mm
X.XX	±0.20	CHECK			SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL					

		上海爱默电子科技有限公司 Tel: 86-21-37680290 Fax: 86-21-37680291	
PART NO.	128-508XXGX2		
TITLE:	5.08mm Terminal Blocks Female 180°		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2017.01.04	NEW DRAWING	